



FINAL INSPECTION REPORT
1x2 Wavelength Combiner / Splitter (WDM)

Item #: RG40A1
SN: T005975



Center Wavelength
Green Port: 532 nm
Red Port: 670 nm
Maximum Optical Power^a
With Connectors or Bare Fiber: 100 mW
Spliced: 250 mW
Fiber Type: Nufern 460-HP

Test Data at Center Wavelength ^b		
Port Jacket Color	Green	Red
Wavelength	532 nm	670 nm
Transmission ^c	99.8%	98.6%
Insertion Loss ^d	0.01 dB	0.06 dB
Isolation ^e	25.9 dB	28.3 dB

Test Data over Bandwidth ^b		
Bandwidth	527-537 nm	665-675 nm
Transmission ^c	99.5%	97.7%
Insertion Loss ^d	0.02 dB	0.10 dB
Isolation ^e	19.7 dB	22.5 dB

- a. Specifies the maximum power allowed through the component. Performance and reliability under high power conditions must be determined within the user's setup.
- b. All values are measured at room temperature without connectors.
- c. Calculated from measured insertion loss data below.
- d. Insertion loss is the ratio of the input power to the output power for each port of the wavelength combiner / splitter (WDM).
- e. Isolation represents the minimum crosstalk between ports.

Verified by: _____

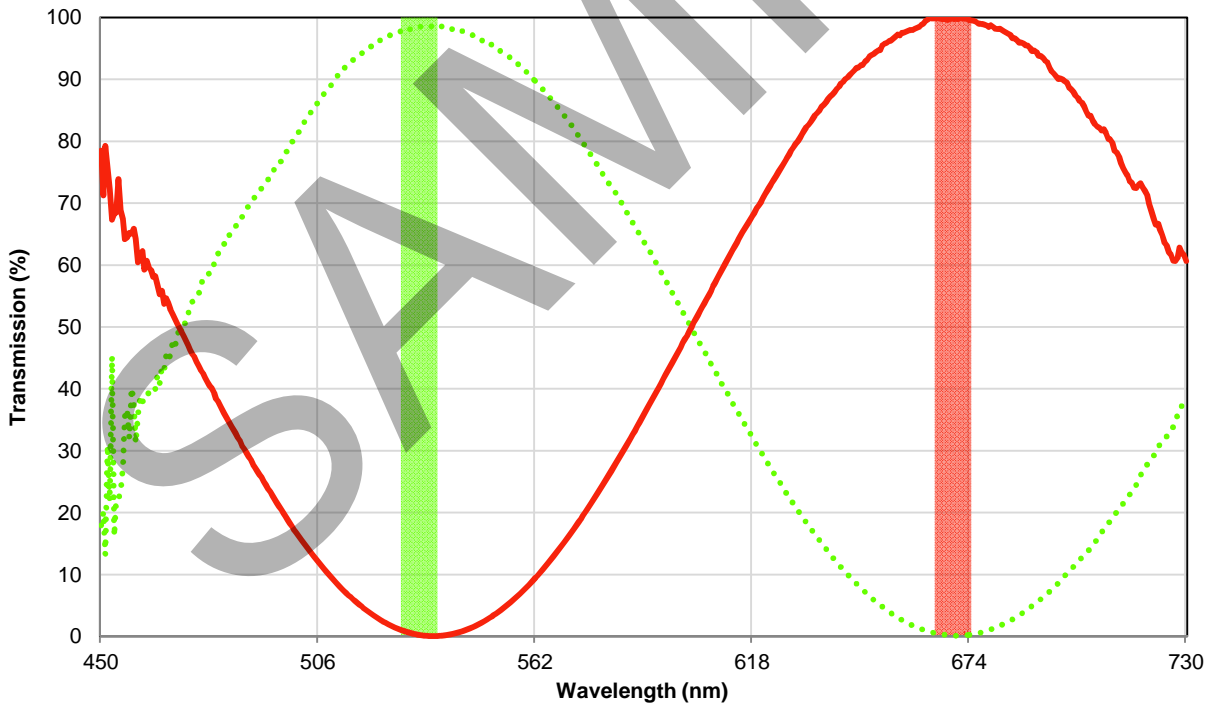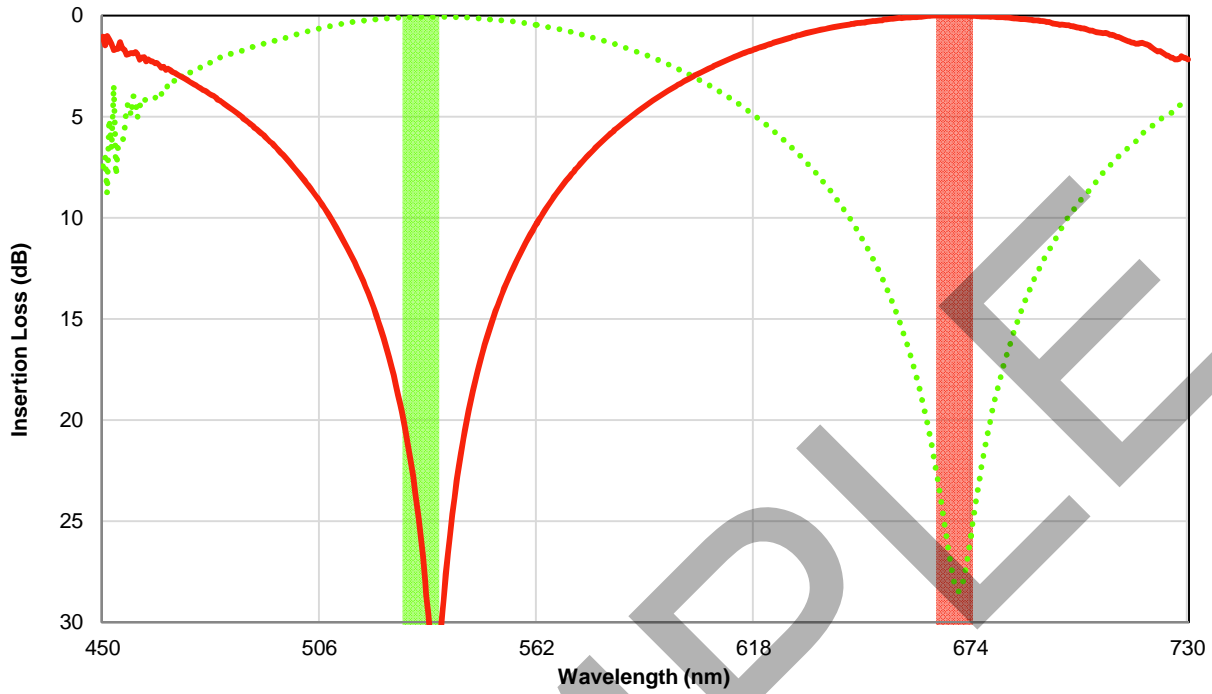

This wavelength combiner / splitter (WDM) operation is only guaranteed over the specified bandwidth as defined by the colored regions above. Thorlabs displays a wider wavelength range to provide insight into how this particular device would perform if used outside its guaranteed operating range. The out-of-band performance can vary from device to device.